

PRODUCT SPECIFIC DATA:

**HERITAGE****SPECIES:** **Antique Reclaimed Oak (Mix of Red/White Oak)****GRADE:** Character**FINISH:** Hardwax Oil

Janka Hardness (ASTM D 1037): 1,325

HERITAGE is a mix of reclaimed red & white oak creating a pleasing variation of colors. Expect a warm palette of colors, with dense & varying grain patterns. Typical character marks include mineral staining, color changes, weathering, checking, nail holes, and knots. Available SOLID or ENGINEERED.

HERITAGE

SOLID - SKU #EN-750311

ENGINEERED - SKU #EN-625311

**WORMWOOD****SPECIES:** **Antique Reclaimed Chestnut****GRADE:** Character**FINISH:** Hardwax Oil

Janka Hardness (ASTM D 1037): 540

WORMWOOD's color can range from light tans to deep browns. Truly unique, American Chestnut is a species that is now effectively extinct due to an extreme blight at the turn of the 20th century. Typical character marks include mineral staining, color changes, weathering, checking, nail holes, knots and a generous amount of worm holes. Available SOLID or ENGINEERED.

WORMWOOD

SOLID - SKU #EN-750312

ENGINEERED - SKU #EN-625312

**RESONANCE****SPECIES:** **Antique Reclaimed Heart Pine****GRADE:** Character**FINISH:** Hardwax Oil

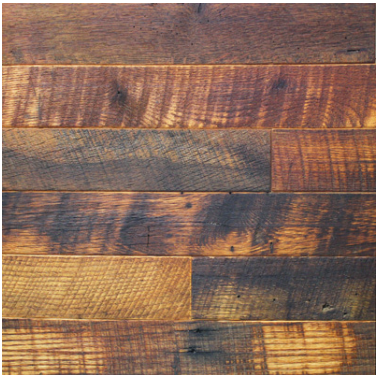
Janka Hardness (ASTM D 1037): 1,225

Heart Pine is another species of wood that suffered near-extinction, in this case due to over-harvesting. RESONANCE includes a mix of tight grain and wide grain and ranges in color from yellow to a deep orange patina. Typical character marks include mineral staining, color changes, weathering, checking, nail holes, and knots. Available SOLID or ENGINEERED.

RESONANCE

SOLID - SKU #EN-750313

ENGINEERED - SKU #EN-625313

**TRADEMARK****SOURCE:** **Reclaimed Barn Siding - Skip Planed****GRADE:** Rustic**FINISH:** Hardwax Oil

TRADEMARK is mixed species reclaimed barn siding that has been skip planed and finished with a hardwax oil. Skip planing is a process whereby the boards are put thru a planer set to only remove the high points, "skipping" over the low points to create contrast. Expected a wide variety of color and generous amounts of character. This material has a textured surface. Typical character marks include mineral staining, color changes, weathering, checking, nail holes, and knots. Available SOLID or ENGINEERED.

TRADEMARK

SOLID - SKU #EN-750314

ENGINEERED - SKU #EN-625314

Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN TIMBER co.'s products.

PRODUCT SPECIFIC DATA:



JAVELIN
SOLID - SKU #EN-750324
ENGINEERED - SKU #EN-625324

JAVELIN

SPECIES: **Antique Reclaimed Oak (Mix of Red/White Oak)**

GRADE: Rustic

FINISH: Matte Polyurethane

Janka Hardness (ASTM D 1037): 1,325

JAVELIN is Antique Reclaimed Oak that has been skip planed, bleached and finished with a durable polyurethane top coat making for a beautifully rustic floor or wall cladding. Available SOLID or ENGI-NEERED.



STOUT
SOLID - SKU #EN-750322

STOUT

SPECIES: **Antique Reclaimed Hickory**

GRADE: Character

FINISH: Hardwax Oil

Janka Hardness (ASTM D 1037): 1,820

Hickory is known for its strength and durability as well as the strong contrast between lighter sapwood and darker heartwood. Reclaimed Hickory displays rich color tones, irregular grain patterns and plenty of character marks including mineral staining, color changes, weathering, checking, nail holes, knots and sometimes wormholes. Available as SOLID RANDOM WIDTH ONLY.

STANDARD MILLWORK:

Tongue & Groove, Endmatched

STANDARD DIMENSIONS & EDGE DETAIL:

	Solid	Engineered
Thickness:	3/4"	5/8" (4 mm wear layer)
Width:	5"	5"
Random Lengths:	2'-10'	2'-10'
Edges:	Microbevel	Microbevel

Note: Additional thicknesses, widths and lengths available upon request.

FINISH SPECS: Hardwax Oil

FLASH POINT	ASTM D 93: > 215°F (PenskyMartens)
RESISTANCE TO WATER	(NEN-EN 13442): no visual or tangible changes.
RESISTANCE TO WEAR	(NEN 2072 – Taber Abraser en CS 17 sanding wheels): strong absorption basantol liquid, only after 800 to 1000 rotations.
RESISTANCE TO HEAT	Until 212 °F



BARN GREY
SOLID - SKU #EN-750326



BLACK & TAN
SOLID - SKU #EN-750327



BUCOLIC BLANC
SOLID - SKU #EN-750317



RUSTIC ROUGE
SOLID - SKU #EN-750316



REED
SOLID - SKU #EN-750325
UNFINISHED

BARN GREY, BLACK & TAN, BUCOLIC BLANC, RUSTIC ROUGE, REED

SPECIES:	Reclaimed Hemlock
GRADE:	Rustic
TREATMENT:	Wirebrushed
FINISH:	STAIN/SEALER (NOTE: REED IS UNFINISHED)
Janka Hardness (ASTM D 1037):	500

BARN GREY, BLACK & TAN, BUCOLIC BLANC, RUSTIC ROUGE feature antique reclaimed hemlock that has been wirebrushed to accentuate the unique grain pattern of hemlock and finished with a stain/sealer. REED is standardly antique recalimed hemlock that is brushed and UNFINISHED. The materials are appropriate for interior wall and ceiling cladding (not appropriate for flooring). Face nailing recommended. Thickness, width and lengths may vary due to the nature of this reclaimed material. Standard milling is square edge; available with Tongue & Groove upon request.

STANDARD DIMENSIONS & MILLING:

	Solid
Thickness:	+ - 7/8"
Width:	7"
Random Lengths:	4'-12'
Edges:	Square
Milling:	S4S

PRODUCT SPECIFIC DATA:



WEATHERWORN
SOLID - SKU #EN-750315

WEATHERWORN
SOURCE: Reclaimed Barn Siding

WEATHERWORN do not have a finish applied as the boards have been naturally oxidized over the years to produce a tough, weather resistant “skin”. Typical character marks include mineral staining, color changes, weathering, checking, nail holes, knots, and heavy patina. Available in SOLID ONLY. Call to discuss custom lengths and widths. Due to the nature of this material, thicknesses tend to vary slightly.

	Solid
Thickness:	1/2"
Random Widths:	3-1/2", 4-1/2", 5-1/2", 6-1/2" random widths
Random Lengths:	4'-12'
Edges:	Square
Milling:	S4S



OLD SCHOOL
SOLID - SKU #EN-750319

OLD SCHOOL
SOURCE: Reclaimed Oak Barn Siding - Skip Planed

OLD SCHOOL begins as WEATHERWORN and goes thru an additional step called “skip planing”. Skip planing is a process whereby the boards are put thru a planer set to only remove the high points, “skipping” over the low points to create contrast. Typical character marks include mineral staining, color changes, weathering, checking, nail holes, knots, and heavy patina. Available in SOLID ONLY. Call to discuss custom lengths and widths. Due to the nature of this material, thicknesses tend to vary slightly. Unfinished.

	Solid
Thickness:	3/4"
Width:	5"
Random Lengths:	2-10'
Edges:	Square
Milling:	Tongue & Groove, Endmatched

INSTALLATION GUIDE:

	Solid	Engineered
Above-grade	YES	YES
On-grade	YES	YES
Below-grade	NO	YES
Over Radiant Heat	YES	YES

ACCEPTABLE SUB-FLOORS and INSTALLATION METHODS - see installation guidelines for additional details and recommended adhesive:

- Plywood Sub-floor : Glue-down, Nail-down, Staple-down
- Concrete Sub-floor: Glue-down

enCORE collection SUSTAINABLE ATTRIBUTES:

CERTIFICATION	Available as FSC-Certified
POSSIBLE LEED CREDITS	MR 4 - Recycled Content MR 5 - Regional Materials MR 6 - Rapidly Renewable Resource (Hardwax-Oil Finish) MR 7 - Certified wood (as FSC-Certified) EQ 4.1 - Low-emitting materials: Adhesives & Sealants (Hardwax-Oil Finish) EQ 4.2 - Low-emitting materials: Paints & Coatings (Hardwax-Oil Finish) EQ 4.4 - Low-emitting materials: Composite Wood & Agrifiber Products (Engineered)