

PRODUCT SPECIFIC DATA:



CHEEKY

ENG 3/4" (6mm) SKU #EX-750407
ENG 5/8" (4mm) SKU #EX-625407
prefinished with polyurethane




KIP

ENG 3/4" (6mm) SKU #EX-750408
ENG 5/8" (4mm) SKU #EX-625408
prefinished with hardwax oil



AMITY

ENG 3/4" (6mm) SKU #EX-750401
ENG 5/8" (4mm) SKU #EX-625401
prefinished with polyurethane

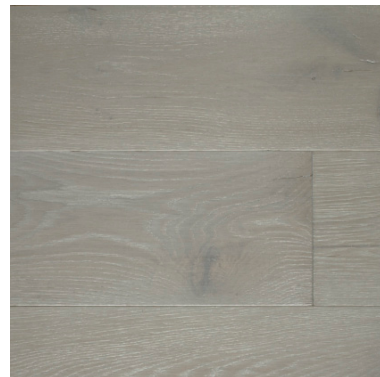


FROSTISEN

ENG 3/4" (6mm) SKU #EX-750403
ENG 5/8" (4mm) SKU #EX-625403
prefinished with polyurethane




BOLLOCKS

ENG 3/4" (6mm) SKU #EX-750409
ENG 5/8" (4mm) SKU #EX-625409
prefinished with hardwax oil

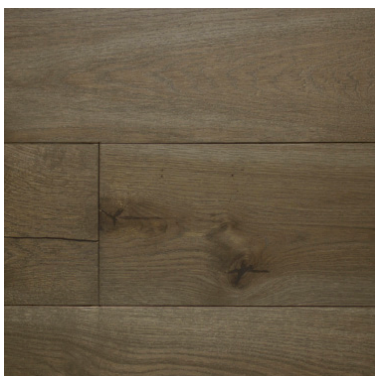


ZED

ENG 3/4" (6mm) SKU #EX-750406
ENG 5/8" (4mm) SKU #EX-625406
prefinished with hardwax oil

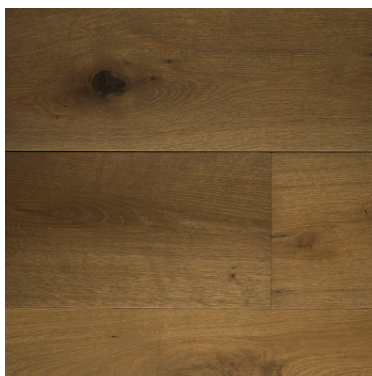

MATE

ENG 3/4" (6mm) SKU #EX-750405
ENG 5/8" (4mm) SKU #EX-625405
prefinished with hardwax oil

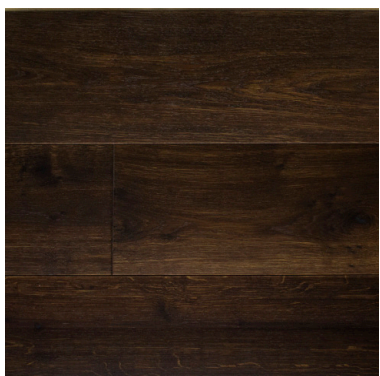

FORTNIGHT

ENG 3/4" (6mm) SKU #EX-750404
ENG 5/8" (4mm) SKU #EX-625404
prefinished with hardwax oil



CHEERS

ENG 3/4" (6mm) SKU #EX-750411
ENG 5/8" (4mm) SKU #EX-625411
prefinished with hardwax oil



TODDY

ENG 3/4" (6mm) SKU #EX-750410
ENG 5/8" (4mm) SKU #EX-625410
prefinished with polyurethane



GOVERNOR

ENG 3/4" (6mm) SKU #EX-750412
ENG 5/8" (4mm) SKU #EX-625412
prefinished with hardwax oil



TOFF

ENG 3/4" (6mm) SKU #EX-750413
ENG 5/8" (4mm) SKU #EX-625413
prefinished with hardwax oil

SPECIES:	European White Oak
CUT:	Original Cut
GRADE:	Character
Janka Hardness (ASTM D 1037):	1,360
Flame Spread Class Rating (ASTM E 84):	Class III (C)
Flame Spread Index (ASTM E 84):	100
Smoke Developed Index (ASTM E 84):	100

STANDARD MILLWORK:

Tongue & Groove, Endmatched

STANDARD DIMENSIONS & EDGE DETAIL:

	Engineered	Engineered
Thickness:	5/8" (4 mm wear layer)	3/4" thick (6mm)
Width:	7"	7"
Random Lengths:	2'-10'	2'-10'
Edges:	Microbevel	Microbevel

Available as FSC-Certified Upon Request

INSTALLATION GUIDE:

	ENGINEERED	Engineered
Above-grade	YES	YES
On-grade	YES	YES
Below-grade	NO	YES
Over Radiant Heat	YES	YES

ACCEPTABLE SUB-FLOORS and INSTALLATION METHODS - see installation guidelines for additional details and recommended adhesive:

Plywood Sub-floor : Glue-down, Nail-down, Staple-down
Concrete Sub-floor: Glue-down

SUSTAINABLE ATTRIBUTES:

CERTIFICATION

Available as FSC-Certified

POSSIBLE LEED CREDITS

MR 7 - Certified wood (as FSC-Certified)
EQ 4.1 - Low-emitting materials: Adhesives & Sealants (Engineered)
EQ 4.4 - Low-emitting materials: Composite Wood & Agrifiber Products (Engineered)

Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN TIMBER co.'s products.

Data from Forest Products Laboratory (FPL) General Technical Report (GTR) 190 - expected to be close to actual measurements of reSAWN TIMBER co.'s products.

Photo Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.