


PRODUCT SPECIFIC DATA:

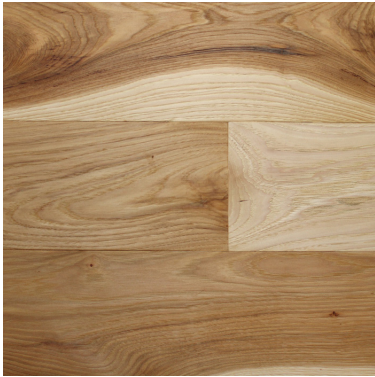

LOCK HAVEN

SPECIES:

Hickory

CUT:

Plain Sawn

GRADE:

Character

FINISH:

Hardwax Oil

Janka Hardness (ASTM D 1037):

1,820*

Flame Spread Class Rating (ASTM E 84):

N/A

Flame Spread Index (ASTM E 84):

N/A

LOCK HAVEN

SOLID - SKU #PL-750120

ENGINEERED - SKU #PL-625120

STANDARD MILLWORK:

Tongue & Groove, Endmatched

STANDARD DIMENSIONS & EDGE DETAIL:

	Solid	Engineered
Thickness:	3/4"	5/8" (4 mm wear layer)
Width:	6"	6"
Random Lengths:	2'-10'	2'-10'
Edges:	Microbevel	Microbevel

Note: Additional widths and lengths available upon request.

FINISH SPECS: Hardwax Oil

FLASH POINT	ASTM D 93: > 215°F (PenskyMartens)
RESISTANCE TO WATER	(NEN-EN 13442): no visual or tangible changes.
RESISTANCE TO WEAR	(NEN 2072 – Taber Abraser en CS 17 sanding wheels): strong absorption basantol liquid, only after 800 to 1000 rotations.
RESISTANCE TO HEAT	Until 212 °F

Photo Disclaimer: Project and product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.

* Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN TIMBER co.'s Western Red Cedar