

Project: GEM PALACE  
Location: 971 Madison Ave, New York, NY  
Architect: David Bers Architecture

Product: **STOCKPORT** - Black Walnut Flooring

Sanjay Kasliwal's Gem Palace is the company's first U.S. store, located at 971 Madison Avenue. Mr. Kasliwal's family has been designing jewels in India for centuries. reSAWN's **STOCKPORT** black walnut flooring compliments the beautiful encased jewels and the saffron silk interior designed by David Bers Architecture. Helmed by Mr. Bers, the firm takes a holistic approach to design, seeking to integrate the new structure into a greater global context.

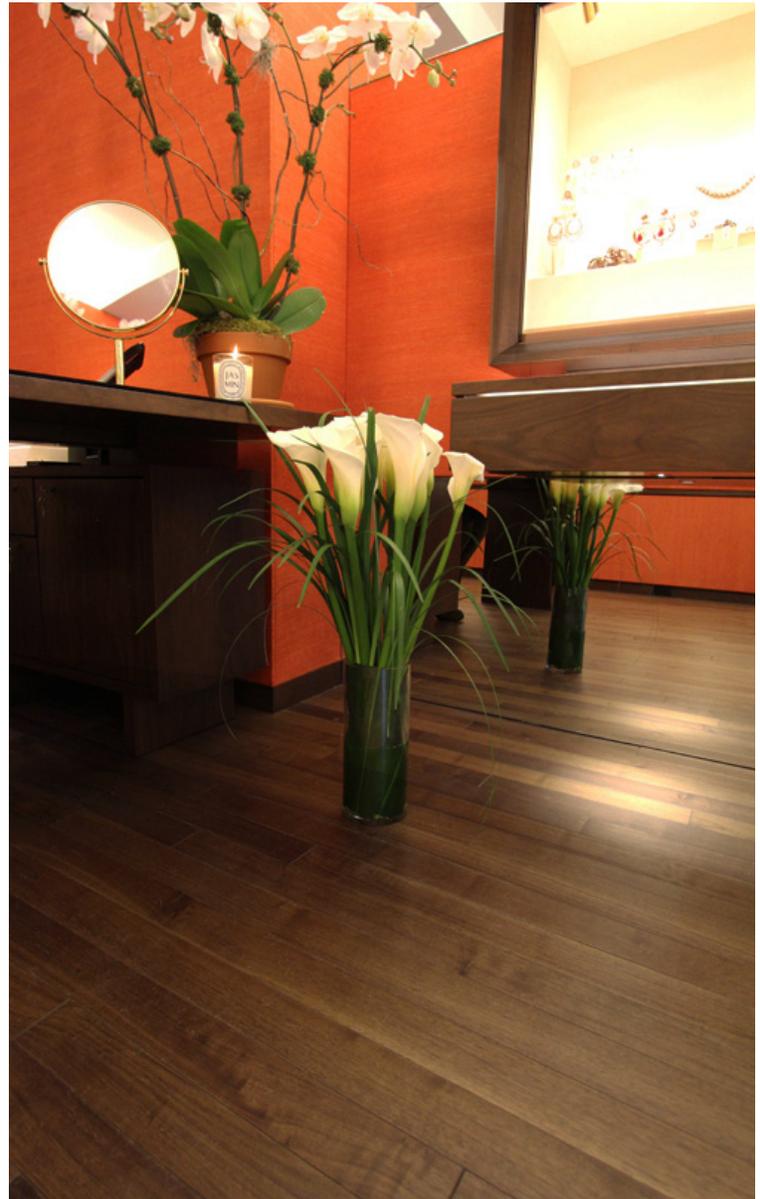


Photo credit: © reSAWN TIMBER co. 2014

Photo Disclaimer: Project and product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.

## PRODUCT SPECIFIC DATA:

reSAWN TIMBER co. worked with David Bers Architecture to specify **STOCKPORT** Black Walnut flooring for this boutique jewelry store on Madison Avenue. **STOCKPORT** is available in solid and engineered construction, in a variety of widths and lengths. This finish is available on Rift & Quarter Sawn Black Walnut or Plain Sawn Black Walnut.

### Flooring:

**STOCKPORT** - Black Walnut (Plain Sawn) - Select/Better Grade - Engineered, Prefinished  
 5/8" thick (4 mm wear layer) X 3" wide X 2-10' random lengths  
 Tongue & Groove, Endmatched, Microbeveled Edges and Ends  
 Prefinished with Natural Oil



### STOCKSPORT

<b>SPECIES:</b>	<b>Black Walnut</b>
GRADE:	Select/Better Grade
CUT:	Plain Sawn
Janka Hardness (ASTM D 1037):	1,010
Flame Spread Class Rating (ASTM E 84):	Class III (C)
Flame Spread Index (ASTM E 84):	130-140

## STANDARD DIMENSIONS, FINISH & EDGE DETAIL:

	Solid	Engineered
Thickness:	3/4"	5/8" (4 mm wear layer)
Width:	5"	5"
Random Lengths:	2'-10'	2'-10'
Edge Detail:	Microbeveled *	Microbeveled *
Finish:	Natural Oil (Clear)	Natural Oil (Clear)

Note: Additional widths and lengths available upon request.

\* Microbeveled Edges recommended for all prefinished products.

## INSTALLATION GUIDE:

	Solid	Engineered
Above-grade	YES	YES
On-grade	YES	YES
Below-grade	<b>NO</b>	YES
Over Radiant Heat	YES	YES

**ACCEPTABLE SUB-FLOORS and INSTALLATION METHODS** - see installation guidelines for additional details and recommended adhesive:

Plywood Sub-floor : Glue-down, Nail-down, Staple-down

Concrete Sub-floor: Glue-down

## SUSTAINABLE ATTRIBUTES:

### CERTIFICATION

Available as FSC-Certified

### POSSIBLE LEED CREDITS

MR 5 - Regional Materials  
 MR 6 - Rapidly Renewable Resource (Natural Oil Finish)  
 MR 7 - Certified wood  
 EQ 4.2 - Low-emitting materials: Paints & Coatings (Natural Oil Finish)  
 EQ 4.4 - Low-emitting materials: Composite Wood & Agrifiber Products ( Engineered)

Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN TIMBER co.'s products.

Data from Forest Products Laboratory (FPL) General Technical Report (GTR) 190 - expected to be close to actual measurements of reSAWN TIMBER co.'s products.