



PAVANE
SOLID - SKU #PR-750724
ENGINEERED - SKU #PR-625724



MEDITATION
SOLID - SKU #PR-750725
ENGINEERED - SKU #PR-625725




MOZARTIANA
SOLID - SKU #PR-750726
ENGINEERED - SKU #PR-625726



NEW LINDENWALD
SOLID - SKU #PR-750131
ENGINEERED - SKU #PR-625131



TARANTELLA
SOLID - SKU #PR-750730
ENGINEERED - SKU #PR-625730

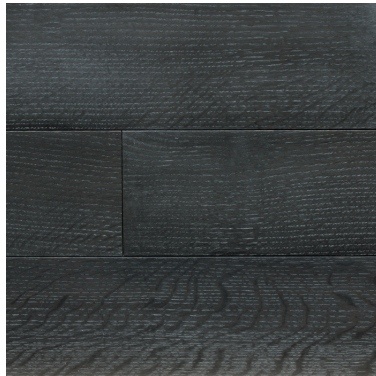

BLACKSTAR
SOLID - SKU #PR-750132
ENGINEERED - SKU #PR-625132

PAVANE, MEDITATION, MOZARTIANA, NEW LINDENWALD, BLACKSTAR, TARANTELLA

SPECIES:	White Oak	Janka Hardness (ASTM D 1037):	1,360
CUT:	Rift/Quarter Sawn	Flame Spread Class Rating (ASTM E 84):	Class III (C)
GRADE:	Select/Better	Flame Spread Index (ASTM E 84):	100
FINISH:	Hardwax Oil	Smoke Developed Index (ASTM E 84):	100

NWFA/NOFMA grading guidelines:

QUARTER/RIFT SAWN: Flooring that is marked or specified as QUARTER/RIFT SAWN or QUARTER/RIFT, is a combination of QUARTER SAWN and RIFT SAWN developing from the production run.

QUARTER SAWN: Flooring that is marked or specified as QUARTER SAWN or QUARTERED; at least 50% of the piece must contain Quartered characteristics. Quartered characteristics as defined by NOFMA are: In cross section the angle of the annual ring tangent to the face of the piece to be between 45° and 90°. Grain lines to be mostly parallel to the length of strips, and medullary ray flecks present and more than 1/16" wide.

RIFT SAWN: Flooring that is marked or specified as RIFT SAWN or RIFT; at least 75% of the piece must contain Rift characteristics. Rift characteristics as defined by NOFMA are: In cross section the angle of the annual ring tangent to the face of the piece to be between 30° to 60°. Grain lines to be mostly parallel to the length of strips and medullary ray flecks less than 1/16" wide.

SELECT GRADE: A flooring product with coloration variations produced by differences of natural heartwood and sapwood, along with characters described. The face may contain: unlimited sound sapwood; slight imperfections in milling; a small tight knot every 3'; pin worm holes; burls and a reasonable amount of slightly open checks. Brown streaks should not extend the entire length of a piece. Two flag worm holes to every 8' are permitted. Slight imperfections in face work (torn grain) admitted. An intermittent, brown machine burn across the face not exceeding 1/4" width admitted.

PRODUCT SPECIFIC DATA:



TIOGA
 SOLID - SKU #PL-750121
 ENGINEERED - SKU #PL-625121

TIOGA

SPECIES: White Oak
CUT: Plain Sawn
GRADE: Select/Better
FINISH: Hardwax Oil
 Janka Hardness (ASTM D 1037): 1,360
 Flame Spread Class Rating (ASTM E 84): Class III (C)
 Flame Spread Index (ASTM E 84): 100
 Smoke Developed Index (ASTM E 84): 100



LOCK HAVEN
 SOLID - SKU #PL-750120
 ENGINEERED - SKU #PL-625120

LOCK HAVEN

SPECIES: Hickory
CUT: Plain Sawn
GRADE: Character
FINISH: Hardwax Oil
 Janka Hardness (ASTM D 1037): 1,820
 Flame Spread Class Rating (ASTM E 84): N/A
 Flame Spread Index (ASTM E 84): N/A

STANDARD MILLWORK:

Tongue & Groove, Endmatched

STANDARD DIMENSIONS & EDGE DETAIL:

	Solid	Engineered
Thickness:	3/4"	5/8" (4 mm wear layer)
Width:	5"	5"
Random Lengths:	2'-10'	2'-10'
Edges:	Microbevel	Microbevel

Note: Additional widths and lengths available upon request.

FINISH SPECS: Hardwax Oil

FLASH POINT	ASTM D 93: > 215°F (PenskyMartens)
RESISTANCE TO WATER	(NEN-EN 13442): no visual or tangible changes.
RESISTANCE TO WEAR	(NEN 2072 – Taber Abraser en CS 17 sanding wheels): strong absorption basantol liquid, only after 800 to 1000 rotations.
RESISTANCE TO HEAT	Until 212 °F

INSTALLATION GUIDE:

	Solid	Engineered
Above-grade	YES	YES
On-grade	YES	YES
Below-grade	NO	YES
Over Radiant Heat	YES	YES

ACCEPTABLE SUB-FLOORS and INSTALLATION METHODS - see installation guidelines for additional details and recommended adhesive:

Plywood Sub-floor : Glue-down, Nail-down, Staple-down
 Concrete Sub-floor: Glue-down

SUSTAINABLE ATTRIBUTES:

CERTIFICATION

Available as FSC-Certified

POSSIBLE LEED CREDITS

- MR 5 - Regional Materials
- MR 6 - Rapidly Renewable Resource (Hardwax-Oil Finish)
- MR 7 - Certified wood
- EQ 4.1 - Low-emitting materials: Adhesives & Sealants (Hardwax-Oil Finish)
- EQ 4.2 - Low-emitting materials: Paints & Coatings (Hardwax-Oil Finish)
- EQ 4.4 - Low-emitting materials: Composite Wood & Agrifiber Products (Engineered)

Photo Disclaimer: Project and product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.

Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN TIMBER co.'s products.

Data from Forest Products Laboratory (FPL) General Technical Report (GTR) 190 - expected to be close to actual measurements of reSAWN TIMBER co.'s products.