

2C PROTECTOR TECH SPECS

2C denotes Accoya wood that is prefinished with one coat of our proprietary exterior oil in the factory AND will require the installer to apply a second coat of finish post-install. This finish will be included on the sales order and shipped with the materials. Applying a second coat of finish post-install will further saturate the initial color of the cladding and extend the duration of this deeper color. Contact reSAWN for accelerated weathering images of our 2C offering.

EXTERIOR ONLY FINISHES:



CERRO 2C



SUGIO 2C



BROADMOOR 2C



EIGER 2C

SHOWN WEATHERED 2 MONTHS



CUYAHOGA 2C


SHOWN WEATHERED 2 MONTHS



KATMAI 2C



RAILAY 2C

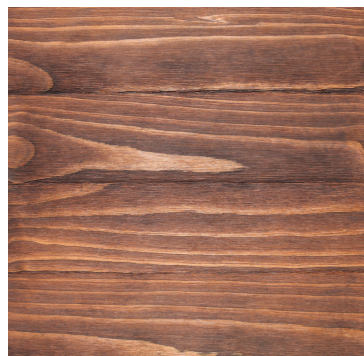

WATSON 2C



RENNE 2C

Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match. Images shown with 2 coat application. Colors are subject to natural weathering - contact reSAWN for weathering guidelines.

EXTERIOR ONLY FINISHES (cont.):



LASSEN 2C



SAGUARO 2C



HURON 2C
SHOWN WEATHERED 2 MONTHS



MAHO 2C
SHOWN WEATHERED 2 MONTHS



PALAWAN 2C
SHOWN WEATHERED 2 MONTHS

PRODUCT SPECIFICATIONS:

Ingredients: Water, refined plant oil, medium oil alkyd, zinc & lead free driers, low VOC co-solvent, moldicide, earth oxide pigment.

VOC content: <85g/L.

Coverage: 2nd COAT applied on site: 80 - 100 sf per liter (320 - 400 sf per 4 liter container) (Approximate only).

PRODUCT HANDLING:

- Store with lid tightly closed in a cool place with ambient temperature min 41°F - max 104°F.
- Clean up with water. Keep out of drains and waterways.
- Soak cloths in warm soapy water, rinse and hang to dry as they may self ignite if left unattended.
- Keep out of reach of children. Use in a well ventilated area. If swallowed, seek medical advice.

FLASH POINT:

>140°F. (Non-DG for transport).

Full SDS available on request.

Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match. Images shown with 2 coat application. Colors are subject to natural weathering - contact reSAWN for weathering guidelines.

INSTRUCTIONS FOR APPLYING 2ND COAT OF WATERBORNE EXTERIOR OIL ON PREFINISHED ACCOYA CLADDING:

These instructions are for 2C materials finished on face only, sealed on back & 2 long edges by reSAWN. 1 coat of factory finish applied, 2nd coat to be applied on site.

SITE CONDITIONS:

1. Ensure timber surfaces are clean, dry, and free from saw dust or metal filings. DO NOT apply oil to timber where the moisture content is above 16%.
2. Only work when weather conditions are dry. Make sure the weather will remain without precipitation for at least 48 hours to allow the coating to dry.
3. Never apply in direct sunlight or at temperatures under 41°F (5°C).
4. Do not cover and do not place heavy objects on the wood until completely dry

APPLICATION:

1. Shake/stir finish well prior to and during use ensuring all pigment is agitated. Do **not** thin product.
2. Seal all cut ends following instructions in reSAWN's Exterior Install Guidelines
3. Back side of materials have been sealed by reSAWN and do not require additional coating.
4. **SECOND COAT:** Second coat should be applied post-install working from the bottom of the structure and moving up. Apply one thin even coat with a brush or applicator pad to the face of the planks. Maintain a wet edge to avoid lap marks. Start with a less visible area and test to establish technique.
5. **OF NOTE:**
 - This is a penetrating stain, unevenness in the timber grain, surface preparation and or application will result in differential appearance. Apply evenly and do not allow overlapping areas to dry during application.
 - The finishes **EIGER 2C, HURON 2C, MAHO 2C, CUYAHOGA 2C and PALAWAN 2C** may appear uneven when received, and after applying the second coat onsite. This is to be expected and the appearance should even out once the cladding is exposed to some weather.

MAINTENANCE:

Refer to reSAWN TIMBER co.'s weathering and maintenance guidelines for post-install care.

PACKAGING:

- 4 liters
- 10 liters (special order - subject to availability)