


Abodo Clear Vertical Grain (CVG) Cladding - Fine Sawn Face

reSAWN TIMBER co.'s Abodo Fine Sawn Face Vulcan Cladding provides a unique, textured surface with beautiful grain depth. This fine sawn texture opens the wood grain to allow for optimal coating performance. Vulcan thermally modified wood cladding is created from New Zealand plantation timbers and engineered with a patented vertical grain orientation for superior weathering characteristics.


All products except for EGRET and STERLING are finished with Abodo Protector Oil. EGRET and STERLING are finished with reSAWN's 0-VOC Exterior Oil.



NERO
EXTERIOR CLADDING

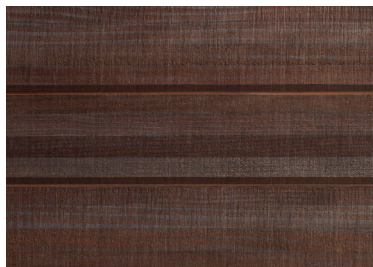

WALNUT
EXTERIOR CLADDING

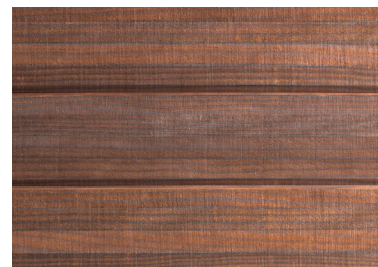

TEAK
EXTERIOR CLADDING



GRAPHITE
EXTERIOR CLADDING



NATURAL
EXTERIOR CLADDING
(WEATHERED 2 MONTHS)



STRAW
EXTERIOR CLADDING



EGRET
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING
(WEATHERED 2 MONTHS)



STERLING
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING



PATINA
EXTERIOR CLADDING
(WEATHERED 2 MONTHS)



SiOO:X
EXTERIOR CLADDING
(PRE-WEATHERED)


Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match. Images shown with 2 coat application. Colors are subject to natural weathering. Wood cladding needs UV exposure in order to achieve the weathered look. Contact reSAWN for weathering guidelines.

Abodo Clear Vertical Grain (CVG) Cladding - Smooth Face

reSAWN TIMBER co.'s Abodo Smooth Face Vulcan Cladding is made using a proprietary brushing technique during manufacturing. Brushing the material opens the wood grain to allow for optimal coating performance. Vulcan thermally modified wood cladding is created from New Zealand plantation timbers and engineered with a patented vertical grain orientation for superior weathering characteristics.

The brushing technique also provides a smooth, modern texture on the face of this unique clear vertical grain modified wood.


All products except for OSPREY and KERERŪ are finished with Abodo Protector Oil. OSPREY and KERERŪ are finished with reSAWN's 0-VOC Exterior Oil.

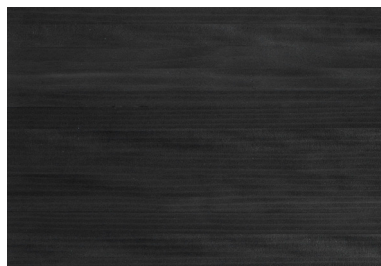


TUI
EXTERIOR CLADDING



WARBLER
EXTERIOR CLADDING

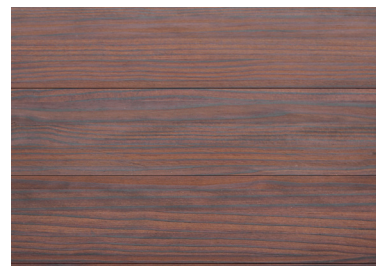

WEKA
EXTERIOR CLADDING

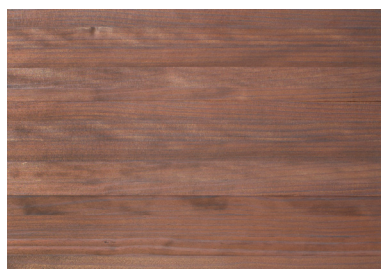

MYNAH
EXTERIOR CLADDING



KāREAREA
EXTERIOR CLADDING
(WEATHERED 2 MONTHS)



KERERŪ
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING



OSPREY
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING
(WEATHERED 2 MONTHS)

Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match. Images shown with 2 coat application. Colors are subject to natural weathering. Wood cladding needs UV exposure in order to achieve the weathered look. Contact reSAWN for weathering guidelines.

Abodo Select Cladding - Flat Sawn Face

reSAWN TIMBER co.'s Abodo Flat Sawn Face Vulcan Cladding provides a high-performing exterior cladding with a unique aesthetic. The thermal modification process means Flat Sawn Vulcan Cladding has enhanced stability, reduced resin content, and is naturally durable so does not require any chemical preservatives.



FIOR
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING



TEURA
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING




TASMAN
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING



NOKI
CHARRED
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING



KAHU
CHARRED
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING

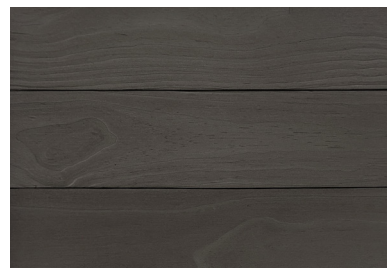

RAKI
CHARRED
EXTERIOR CLADDING & INTERIOR
WALL/CEILING CLADDING


Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match. Images shown with 2 coat application. Colors are subject to natural weathering. Wood cladding needs UV exposure in order to achieve the weathered look. Contact reSAWN for weathering guidelines.

Abodo Light Character (LC) Vertical Grain Cladding - Fine Sawn Face

reSAWN TIMBER co.'s Abodo Fine Sawn Face Vulcan Cladding provides a unique, textured surface with beautiful grain depth. This fine sawn texture opens the wood grain to allow for optimal coating performance. Vulcan thermally modified wood cladding is created from New Zealand plantation timbers and engineered with a patented vertical grain orientation for superior weathering characteristics.

This grade features a light, natural character with some knots, resin pockets, and other natural wood elements. It includes a mix of clear lengths along with naturally occurring features.

Light Character is available in the following finishes: WALNUT, STRAW, TEAK, NATURAL, PATINA, GRAPHITE, NERO, EGRET, STERLING and SIOO:X.

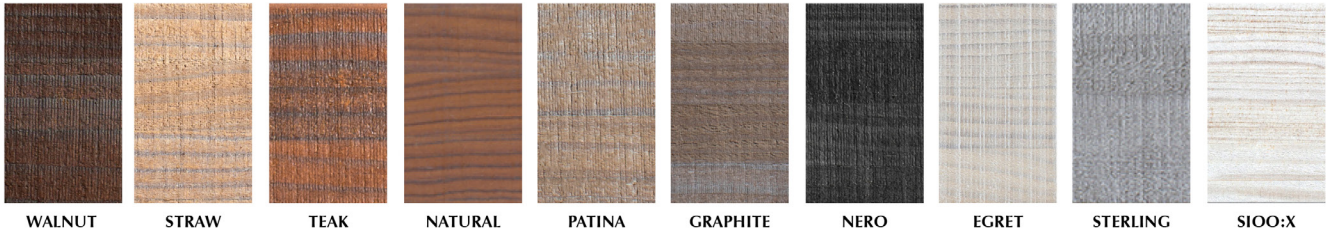

UNFINISHED LIGHT CHARACTER VERTICAL GRAIN



UNFINISHED CLEAR VERTICAL GRAIN

Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match. Images shown with 2 coat application. Colors are subject to natural weathering. Wood cladding needs UV exposure in order to achieve the weathered look. Contact reSAWN for weathering guidelines.

OVERVIEW:

- Vulcan cladding is created from New Zealand plantation timber for superior weathering characteristics.
- The thermal modification process means Vulcan cladding has superior stability and reduced resin content.
- It's naturally durable so Vulcan cladding doesn't require any chemical preservatives, and has a beautiful, consistent brown tone.
- Vulcan cladding is suitable for EXTERIOR applications only with the exception of STERLING, OSPREY, EGRET, KERURŪ, KAHU, RAKI, NOKI, TEURA, TASMAN, and FIOR which can be used on the exterior and interior walls, ceilings, and millwork (not suitable for flooring).

PRODUCT SPECIFICATIONS:

- Wood species: Thermally Modified Radiata Pine (Pinus radiata).
- Durability Class 1 (EN350-1).
- Outstanding dimensional stability.
- All Abodo wood is produced from well managed sustainable sources including FSC® and other regionally certified woods. reSAWN TIMBER co. holds FSC® Chain of Custody Certification.
- Carbon negative footprint: Each square foot of Vulcan Cladding stores ~2lbs of carbon. Abodo wood is an environmentally compatible substitute for carbon intensive materials.
- Environmentally compatible: 100% recyclable and reusable, naturally renewable.
- Warranty: 25 years against fungal decay (subject to terms and conditions).
- Moisture content: Approx. 7% MC (+/-2%) at time of shipping - does not require acclimation prior to installation.
- Hardness: Low (710 lbf) Janka.
- Density: ~ 26 lbs/ft³
- Weight: 2 lbs/sf (light weight cladding)
- Thermal properties: ~ 0.11 W/(mK)
- pH (indicative): ~3.9
- Low VOC (85 g/l) for GRAPHITE, GRAPHITE LC, MYNAH, NERO, NERO LC, PATINA, PATINA LC, STRAW, STRAW LC, TEAK, TEAK LC, TUI, WALNUT, WALNUT LC, WARBLER, WEKA, NATURAL, NATURAL LC, and KāREAREA
- 0 VOC for STERLING, STERLING LC, OSPREY, EGRET, EGRET LC, KERURŪ, KAHU, RAKI, NOKI, TEURA, TASMAN, and FIOR.
- ASTM D5824 - Delamination Resistance
- ASTM D4442 - Moisture Content
- SFM 12-7A-1 - WUI Exterior Wall Siding and Sheathing (excludes Flat Sawn products)

VULCAN CLADDING VERTICAL GRAIN FINE SAWN & SMOOTH SPECS:

- Expected dimensional change in structure: Width expansion approx. 2%, length expansion approx. 0.25%, thickness expansion approx. 2.5% (from 7% MC to fiber saturation - variation will occur between boards).
- Vulcan Vertical Grain cladding is approx. 50% more stable than flat sawn Radiata Pine.
- Grade: Clear Vertical Grain Orientation

VULCAN CLADDING FLAT SAWN SPECS:

- Expected dimensional change in structure: Width expansion approx. 2%, length expansion approx. 0.25%, thickness expansion approx. 2.5% (from 7% MC to fiber saturation - variation will occur between boards).
- Vulcan Flat Sawn cladding is approx. 30% more stable than flat sawn Radiata Pine.
- Grade: Select

INTERIOR RATINGS

- Class Rating*: C (ASTM E84)
- Flame Spread Index*: 85 (ASTM E84)
- Smoke Developed Index*: 180 (ASTM E84)



All Abodo designs are FSC® certified

** All data provided by 3rd party testing by QAI Laboratories done for Abodo Wood. Contact reSAWN TIMBER co. for more information.

APPLICATIONS:

- EXTERIOR cladding
- INTERIOR cladding (STERLING, STERLING LC, OSPREY, EGRET, EGRET LC, KERERŪ, KAHU, RAKI, NOKI, TEURA, TASMAN, and FIOR)

FINISH SPECS:

- GRAPHITE, GRAPHITE LC, MYNAH, NERO, NERO LC, PATINA, PATINA LC, STRAW, STRAW LC, TEAK, TEAK LC, TUI, WALNUT, WALNUT LC, WARBLER, WEKA, NATURAL, NATURAL LC, and KāREAREA are finished on face only, sealed on back & 2 long edges. 1-coat of finish is factory applied; the second coat needs to be applied to the face only on site by the installer post-install
- STERLING, STERLING LC, OSPREY, EGRET, EGRET LC, KERERŪ, KAHU, RAKI, NOKI, TEURA, TASMAN, and FIOR are finished on the FACE only for INTERIOR applications
- STERLING, STERLING LC, OSPREY, EGRET, EGRET LC, KERERŪ, KAHU, RAKI, NOKI, TEURA, TASMAN, and FIOR are finished on face only, sealed on back & 2 long edges for EXTERIOR applications
- SiOO:X and SiOO:X LC is finished on face only, sealed on back & 2 long edges (not appropriate for interior applications)

POSSIBLE LEED CREDITS (V4.1)

- Materials & Resources, Sourcing of Raw Materials (FSC®-Certified)
- Materials & Resources, Material Ingredients, Material Ingredient Reporting

CLEAR VERTICAL GRAIN (CVG) GRADE

- Limited fleck, limited sap stain, limited character-related edge defect
- Very limited bow, crook, cup, and twist
- Small tight knot < 1/4" diameter
- Resin or bark pocket < 1/8" wide x 1-1/4" wide
- Checking less than 2" long

Laminated cladding boards (CVG only) may have one under-thickness lamina up to 3/16" depth on the back of the board, provided the function of the product is not compromised (ie: boards fit together correctly and sit flat on a wall).

LIGHT CHARACTER (LC) VERTICAL GRAIN GRADE

- Sound knots singly and in combination up to one third of the board width only
- Resin pockets less than 1/4" wide x 2-1/2" long, three per board
- Glue voids less than 1/4" wide x 2" long, one per board
- Surface checks less than 8" long
- Spike knots, inter-grown up to 3/4" wide
- Tight encased knots maximum 1-1/4" wide
- Limited sap stain and limited character-related edge defects
- Very limited bow, crook, cup, and twist
- No pith, through-holes or wane

Laminated cladding boards may have mill skip and machining defects present on the back of the boards. Laminated cladding boards may have one under-thickness lamina up to 3/16" depth on the backs of the boards, provided the function of the product is not compromised (ie: boards fit together correctly and sit flat on a wall).

SELECT GRADE

- Sound tight knots singly and in combination in up to 20% of boards
- Tight encased or inter-grown knots less than 3/16" diameter on the best face
- Resin or bark pockets less than 1/8" wide x 1-1/4" long
- Limited sap stain insufficient to obscure grain character
- Limited bird's-eye fleck and natural grain variation
- One character-related edge defect permitted in the lower two-thirds of an edge
- Checking less than 1/32" wide x 2" long
- Very limited bow, crook, cup, and twist
- No pitch, through-holes, or wane

Reverse face may contain knots and defects consistent with Light Character Grade. Cladding profiles may contain skip-dress and machining defects on the back face. Laminated cladding boards may have one under-thickness lamina up to 3/16" depth on the back of the board, provided the function of the product is not compromised (i.e., boards fit together correctly and sit flat on a wall).

Vulcan Cladding Vertical Grain Dimensions and Milling:

NOTE: CUSTOM WIDTH, LENGTHS AND MILLINGS AVAILABLE UPON REQUEST - CONTACT reSAWN TO DISCUSS

WB10


STANDARD DIMENSIONS:

+/- 3/4" thick X +/- 5" wide X 6'-16' random lengths

FACE:

- STERLING, GRAPHITE, NERO, PATINA, STRAW, TEAK, WALNUT, EGRET, SiOO:X, and NATURAL have a Fine Sawn Face
- MYNAH, TUI, WARBLER, WEKA, OSPREY, KERERŪ, and KāREAREA have a Smooth Face
- Arrows indicate face of profile - be sure to install correctly

WB10

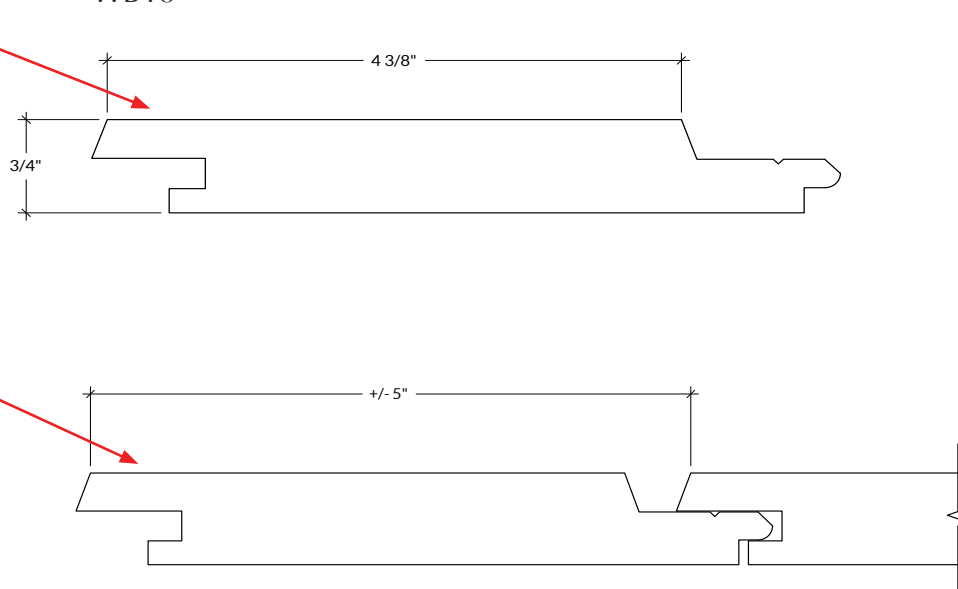

Vulcan Cladding Vertical Grain Dimensions and Milling:

NOTE: CUSTOM WIDTH, LENGTHS AND MILLINGS AVAILABLE UPON REQUEST - CONTACT reSAWN TO DISCUSS

TONGUE & GROOVE


STANDARD DIMENSIONS:

- +/- 3/4" thick X +/- 5-3/8" wide X 6'-16' random lengths
- +/- 3/4" thick X +/- 6-5/8" wide X 6'-16' random lengths
- +/- 11/16" thick X +/- 5" wide X 6'-17.7' random lengths - Applies to Light Character Only


FACE:

- STERLING, STERLING LC, GRAPHITE, GRAPHITE LC, NERO, NERO LC, PATINA, PATINA LC, STRAW, STRAW LC, TEAK, TEAK LC, WALNUT, WALNUT LC, EGRET, EGRET LC, SiOO:X, SiOO:X LC, NATURAL, and NATURAL LC have a Fine Sawn Face.
- MYNAH, TUI, WARBLER, WEKA, OSPREY, KaREAREA, and KERERū have a Smooth Face
- Products have a unique face and back. Ensure board faces are installed facing out. Compare to submittal samples on site prior to installation.
- NOTE: Drawings are not to scale


T&G

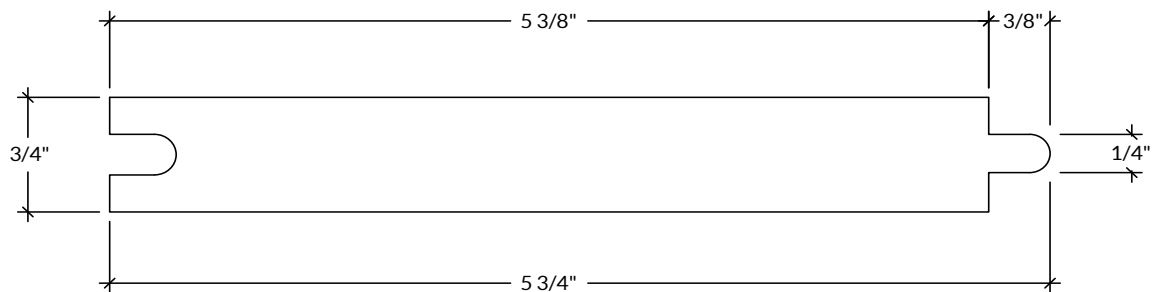

T&G

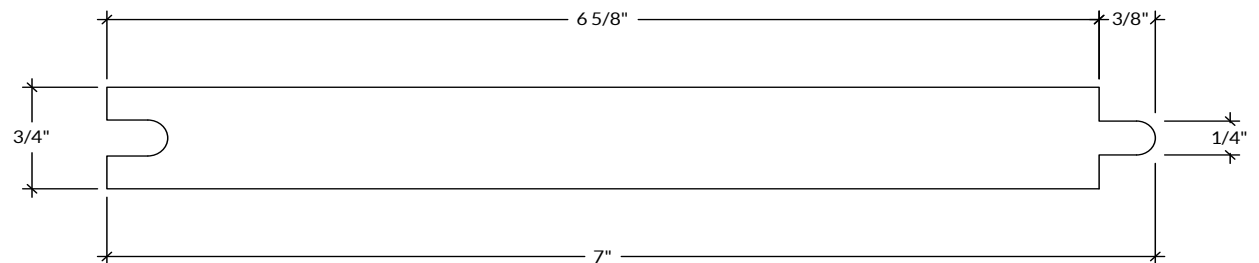

T&G - Applies to Light Character Only

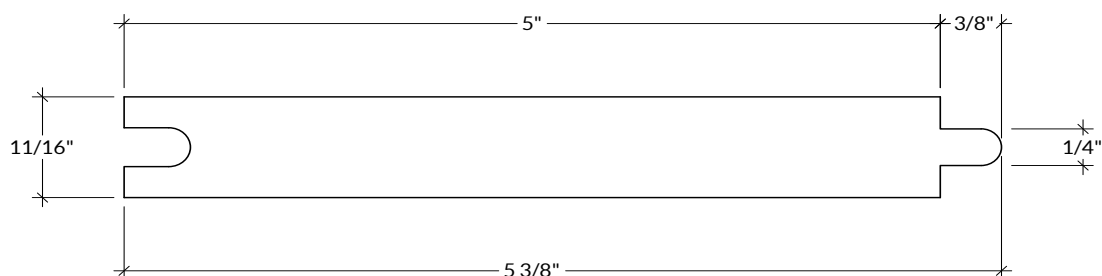

Vulcan Cladding Vertical Grain Dimensions and Milling:

NOTE: CUSTOM WIDTH, LENGTHS AND MILLINGS AVAILABLE UPON REQUEST - CONTACT reSAWN TO DISCUSS

SEM (SQUARE EDGE MODIFIED)


STANDARD DIMENSIONS:

- +/- 3/4" thick X +/- 4-3/4" wide X 6'-16' random lengths
- +/- 3/4" thick X +/- 6-1/16" wide X 6'-16' random lengths


FACE:

- GRAPHITE, NERO, PATINA, STRAW, TEAK, WALNUT, SiOO:X, and NATURAL have a Fine Sawn Face
- MYNAH, TUI, WARBLER, WEKA, and KāREAREA have a Smooth Face
- Arrows indicate face of profile - be sure to install correctly
- These profiles are only approved for VERTICAL wall application only and should not be used in horizontal applications.
- NOTE: Drawings are not to scale


SEM

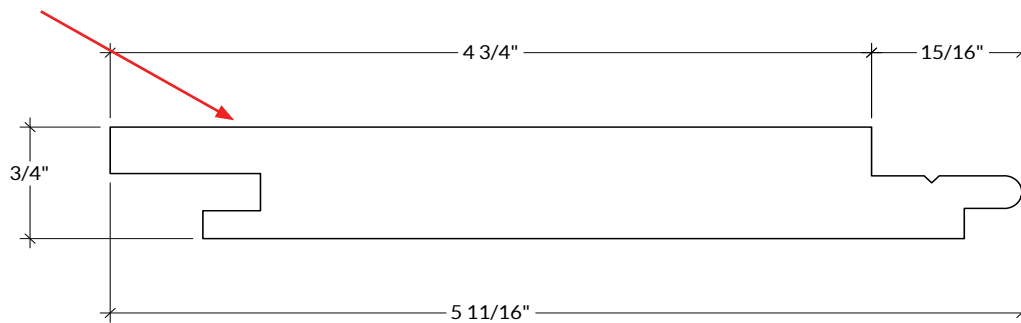

SEM

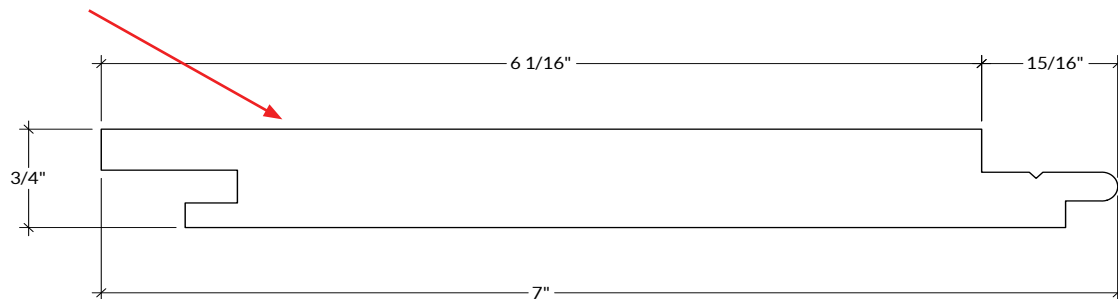

SEM

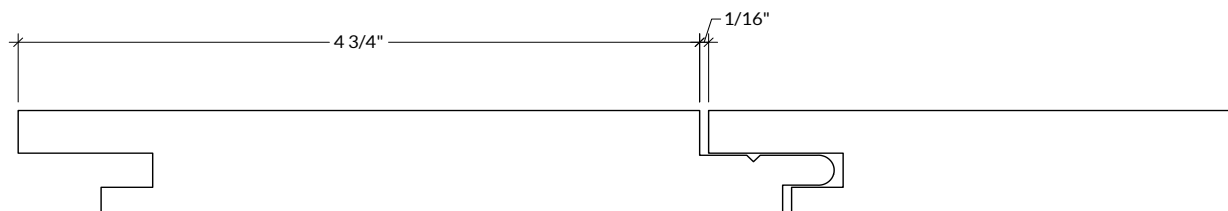

Vulcan Cladding Vertical Grain Dimensions and Milling:

NOTE: CUSTOM WIDTH, LENGTHS AND MILLINGS AVAILABLE UPON REQUEST - CONTACT reSAWN TO DISCUSS

SEM-FLR (SQUARE EDGE MODIFIED - FINE LINE REVEAL)

STANDARD DIMENSIONS:

- +/- 3/4" thick X +/- 4-3/4" wide X 6'-16' random lengths
- +/- 3/4" thick X +/- 6-1/16" wide X 6'-16' random lengths


FACE:

- GRAPHITE, NERO, PATINA, STRAW, TEAK, WALNUT, SiOO:X, and NATURAL have a Fine Sawn Face
- MYNAH, TUI, WARBLER, WEKA, and KāREAREA have a Smooth Face
- Not available for STERLING, EGRET, KERERŪ and OSPREY
- Arrows indicate face of profile - be sure to install correctly


- These profiles are only approved for VERTICAL wall application only and should not be used in horizontal applications.
- SEM-FLR profiles should be installed with a 1/8" expansion gap between boards. A 1/8" gap aligns with the width of the fine line cut into the face of the boards ensuring a uniform approach upon completion of installation. Typical shim used by installers to maintain 1/8" expansion gap: BARWALT SHIM

- NOTE: Drawings are not to scale


SEM-FLR

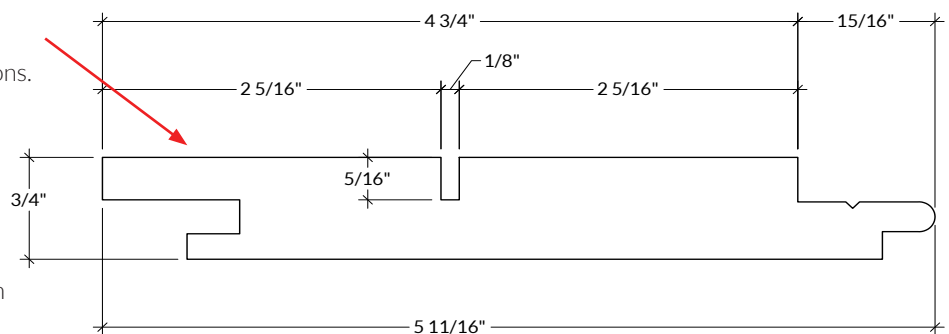

SEM-FLR

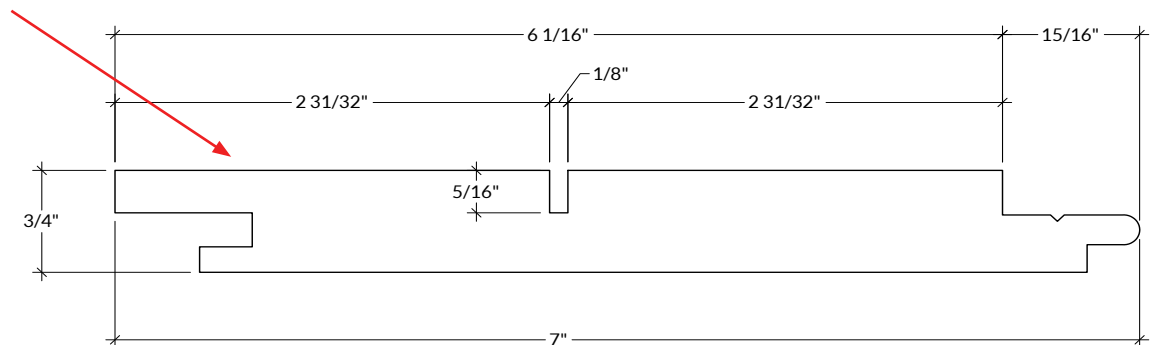

SEM-FLR

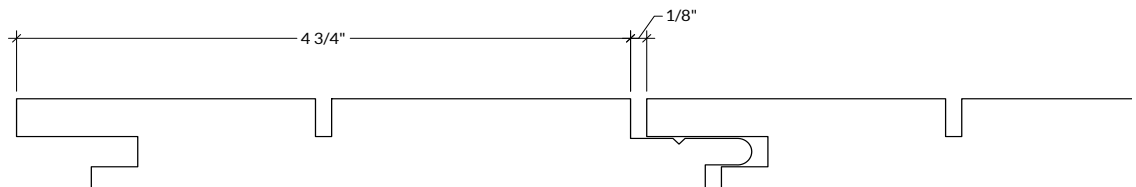

Vulcan Cladding Vertical Grain Dimensions and Milling:

NOTE: CUSTOM WIDTH, LENGTHS AND MILLINGS AVAILABLE UPON REQUEST - CONTACT reSAWN TO DISCUSS

S4S

STANDARD DIMENSIONS:


+/- 3/4" thick X +/- 5-3/4" wide X 6'-16' random lengths

+/- 3/4" thick X +/- 7" wide X 6'-16' random lengths


FACE:

- STERLING, GRAPHITE, NERO, PATINA, STRAW, TEAK, WALNUT, EGRET, SiOO:X, and NATURAL have a Fine Sawn Face
- MYNAH, TUI, WARBLER, WEKA, OSPREY, KāREAREA, and KERERŪ have a Smooth Face
- Products have a unique face and back. Ensure board faces are installed facing out. Compare to submittal samples on site prior to installation.
- NOTE: Drawings are not to scale

S4S

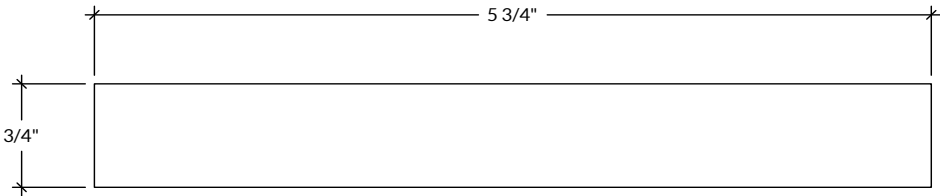

S4S

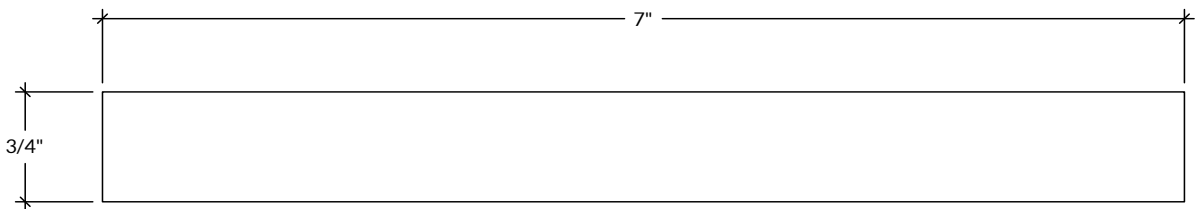

Vulcan Cladding Flat Sawn Dimensions and Milling:

NOTE: CUSTOM WIDTH, LENGTHS AND MILLINGS AVAILABLE UPON REQUEST - CONTACT reSAWN TO DISCUSS

Tongue & Groove, S4S

STANDARD DIMENSIONS:


(T&G) +/- 3/4" thick X +/- 5-1/4" wide X 6'-16' random lengths

(S4S) +/- 3/4" thick X +/- 5-5/8" wide X 6'-16' random lengths

FACE:

- KAHU, RAKI, NOKI, TEURA, TASMAN, and FIOR have a Flat Sawn face with a smooth texture
- Products have a unique face and back. Ensure board faces are installed facing out. Compare to submittal samples on site prior to installation.
- NOTE: Drawings are not to scale

T&G

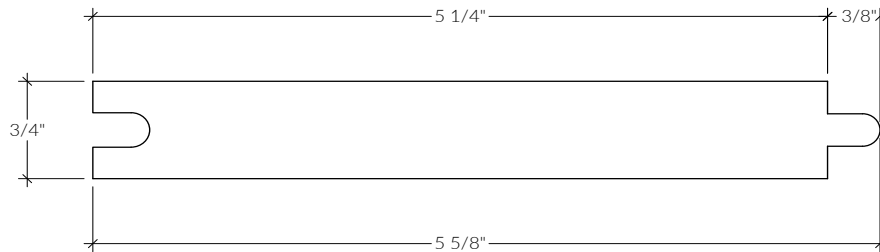

S4S

