

EUROPEAN WHITE OAK - RIFT & QUARTER SAWN




BAYADER

Finished with UV Oil

Select Grade:

ENG 3/4" (6mm) X 5" wide

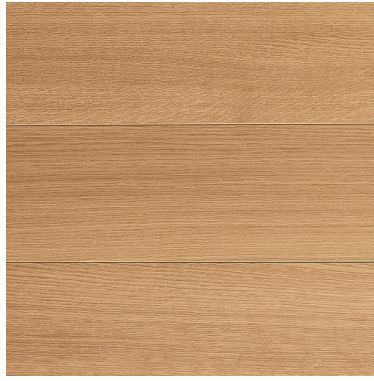


BRAVURA

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide

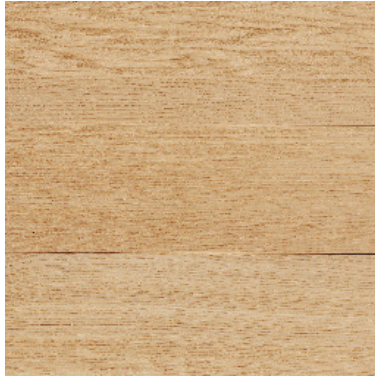

COPPELIA

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide



GISELLE 2.0

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide



RHAPSODY

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide



VIRTUOSO

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide



BRINATO

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide



SAMSARA

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide




PARAMITO

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide

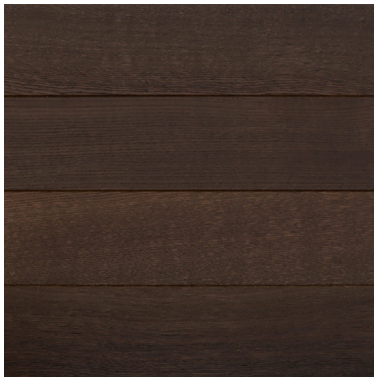

CAMPAGNA

Finished with Matte Polyurethane

Select Grade:

ENG 3/4" (6mm) X 5" wide

Photo Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.

EUROPEAN WHITE OAK - RIFT & QUARTER SAWN

ADDITIONAL SPECIFICATIONS:

SPECIES:	European White Oak
GRADE:	Select
CUT:	Rift & Quarter Sawn
APPLICATIONS:	Interior Flooring, Wall & Ceiling Cladding
LENGTHS:	2'-10' Random Lengths
MILLING:	T&G, Endmatched
EDGES:	Microbeveled Edges and Ends
Janka Hardness (ASTM D 1037):	1,360 *
Flame Spread Class Rating (ASTM E84):	Class III (C) **

*Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN products.

**Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2024. Testing is on unfinished, solid wood. reSAWN's products are not tested but are expected to be close to actual measurements for comparable wood species -- can be treated to Fire Treated to Class A for Interior Applications - please call to inquire.

EUROPEAN WHITE OAK - CHARACTER & SELECT



ACE

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



AMITY

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



BASTILLE

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



CHEERIO

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) x 7" wide
ENG 3/4" (6mm) x 7" wide
ENG 3/4" (6mm) x 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) x 7" wide
ENG 3/4" (6mm) x 7" wide
ENG 3/4" (6mm) x 8-5/8" wide



BARTEK


Finished with UV Oil

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

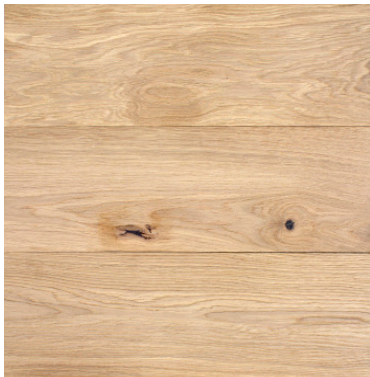

POSH 2.0

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



BOLLOCKS

Finished with UV Oil

Character Grade:

ENG 3/4" (6mm) X 7" wide



GOVERNOR

Finished with UV Oil

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Photo Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.

EUROPEAN WHITE OAK - CHARACTER & SELECT



VENTOSO

Finished with UV Oil

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



SELVATICO

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



KIP

Finished with UV Oil

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



MARGOT

Finished with UV Oil

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



MATE

Finished with UV Oil

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



PRASADA

Finished with Hardwax Oil

Character Grade:

ENG 3/4" (5mm) X 7-1/2" wide
Select Grade:
ENG 3/4" (5mm) X 7-1/2" wide



PROPER

Finished with UV Oil

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



TOFF

Finished with UV Oil


Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

EUROPEAN WHITE OAK - CHARACTER & SELECT

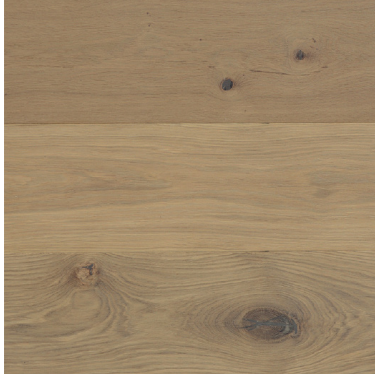

ARBORIA

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



BOSQUE

Finished with Matte Polyurethane

Character Grade:

ENG 3/4" (5mm) X 7-1/2" wide

Select Grade:

ENG 3/4" (5mm) X 7-1/2" wide



FIORELLA

Finished with Hardwax Oil

Character Grade:

ENG 3/4" (5mm) X 7-1/2" wide

Select Grade:

ENG 3/4" (5mm) X 7-1/2" wide



MANGATA

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



VERDANT

Finished with Matte Polyurethane

Character Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide

Select Grade:

ENG 5/8" (4mm) X 7" wide
ENG 3/4" (6mm) X 5" wide
ENG 3/4" (6mm) X 7" wide
ENG 3/4" (6mm) X 8-5/8" wide



SONDER

Finished with Hardwax Oil

Character Grade:

ENG 3/4" (5mm) X 7-1/2" wide

Select Grade:

ENG 3/4" (5mm) X 7-1/2" wide

EUROPEAN WHITE OAK - CHARACTER & SELECT

ADDITIONAL SPECIFICATIONS:

SPECIES:	European White Oak
GRADE:	Character and Select
CUT:	Original (If Character), Plain Sawn (If Select)
APPLICATIONS:	Interior Flooring, Wall & Ceiling Cladding
LENGTHS:	2'-10' Random Lengths
MILLING:	T&G, Endmatched
EDGES:	Microbeveled Edges and Ends
Janka Hardness (ASTM D 1037):	1,360 *
Flame Spread Class Rating (ASTM E84):	Class III (C) **

*Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN products.

**Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2024. Testing is on unfinished, solid wood. reSAWN's products are not tested but are expected to be close to actual measurements for comparable wood species -- can be treated to Fire Treated to Class A for Interior Applications - please call to inquire.

Photo Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.

GRADING GUIDELINES:

Character Grade

This grade includes filled knots up to approximately 2" diameter, star knots up to approximately 2-1/2" diameter, limited checking, and the presence of sap wood. Greater tonal variation will be present. Slight milling imperfections and torn grain may be present in limited areas as well as limited brown streaking and worm holes. Fill will be brown or black in tone.

Select Grade

This grade includes occasional small, sound filled knots up to approximately 5/8" diameter. Sap wood is very limited. Tone within the grade tends to be more consistent as compared to Character Grade. Limited pin worm holes and slight checking may be present. Fill, if present, will be brown or black in tone.

AVAILABLE CUTS:

Rift & Quarter Sawn

This cut includes a combination of quarter sawn and rift sawn material.

Quarter sawn patterning is characterized by growth rings between 45 and 90 degrees to the face of the board, often resulting in grain lines that are mostly parallel to the length of the board with medullary ray flecks present and more than 1/16" wide.

Rift sawn patterning is characterized by growth rings between 30 and 60 degrees to the face of the board, often resulting in grain lines that are consistently parallel to the length of the board with medullary ray flecks less than 1/16" wide.

Plain Sawn

This cut includes patterning that is characterized by growth rings at 30 degrees or less to the face of the board, often resulting in a cathedral grain pattern. Some vertical and tighter grain characteristics may be present from board to board.

Original Cut

This is a method of cutting a log straight through its diameter without turning. This approach incorporates plain sawn, quarter sawn and rift sawn grain patterns in the face of the resulting boards and includes a range of character marks in the final product. Common character marks include knots, checks, streaks and worm holes.

INSTALLATION GUIDE:

- Acclimatization is vital to minimize swelling & shrinking of material
- Visit resawntimberco.com's A+D Support page to download Installation Guidelines


Application	Engineered
Above-grade	YES
On-grade	YES
Below-grade	YES
Over Radiant Heat	YES

ACCEPTABLE SUB-FLOORS AND INSTALLATION METHODS - see installation guidelines for additional details and recommended adhesive:

Plywood Sub-floor: Glue-down (Engineered Recommended), Nail-down, Staple-down

Concrete Sub-floor: Glue-down (Engineered Recommended)

PACKAGING AND FREIGHT: All shipments are carefully packaged on 10'-12' long pallets

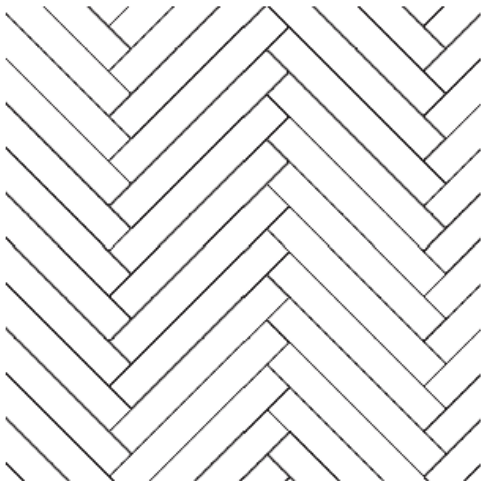

HERRINGBONE - STANDARD DIMENSIONS & EDGE DETAIL:

	Engineered	Engineered
Thickness:	5/8" (4mm wear layer)	3/4" (6mm)
Width:	4"	4"
Lengths:	24"	24"
Edges:	Microbevel (finished)	Microbevel (finished)
	Square Edge (unfinished)	Square Edge (unfinished)
Milling:	T&G, Double End Grooved	T&G, Double End Grooved

Herringbone material in 4" width x 24" length dimensions in Select Grade, Plainsawn is available in the following products: ACE, AMITY, ARBORIA, BARTEK, BASTILLE, KIP, MANGATA, MATE, POSH 2.0, PROPER, SELVATICO, VENTIOSO, and VERDANT.

Custom Herringbone options as well as Chevron options available upon request/consultation - contact reSAWN for more details.

SUSTAINABLE ATTRIBUTES:

CERTIFICATION: Available as FSC®-Certified 

POSSIBLE LEED CREDITS: MR 6 - Rapidly Renewable Resource (Hardwax-Oil Finish)
MR 7 - Certified wood (if sold as FSC®-Certified)
EQ 4.1 - Low-emitting materials: Adhesives & Sealants (Engineered)
EQ 4.2 - Low-emitting materials: Paints & Coatings (Hardwax-Oil Finish)