

WESTERN RED CEDAR



PACKARD 2.0
WESTERN RED CEDAR - CVG



TRUMAN
WESTERN RED CEDAR - STK



JENNINGS 2.0
WESTERN RED CEDAR - STK




ASTOR
WESTERN RED CEDAR - STK



CASCA
WESTERN RED CEDAR - STK




REYES
WESTERN RED CEDAR - STK

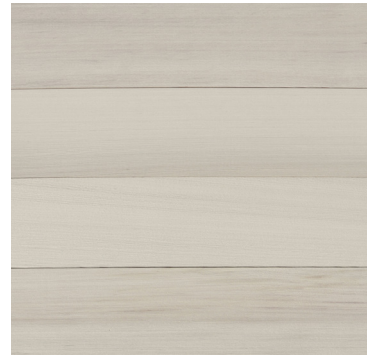

BRUNEAU
WESTERN RED CEDAR - CVG



TETON
WESTERN RED CEDAR - CVG

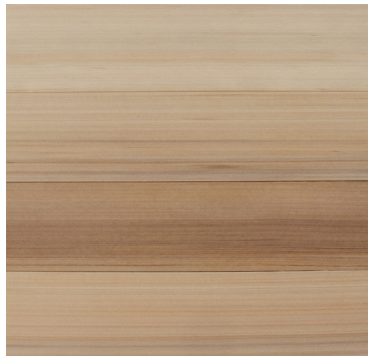

WHIDBEY
WESTERN RED CEDAR - CVG

SPECIFICATIONS:

SPECIES:	Western Red Cedar
APPLICATIONS:	Exterior & Interior Cladding
GRADES:	Select Tight Knot and Clear Vertical Grain
Janka Hardness (ASTM D 1037):	350 *
Flame Spread Class Rating (ASTM E84):	Class II (B) **
Smoke Developed Index (ASTM E84):	125 **

NOTE: SOME PRODUCTS ARE AVAILABLE FIRE TREATED TO CLASS A FOR INTERIOR APPLICATIONS.

*Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN products.

**Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2024. Testing is on unfinished, solid wood. reSAWN's products are not tested but are expected to be close to actual measurements for comparable wood species — some products can be treated to Fire Treated to Class A for Interior Applications - please call to inquire.

Photo Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.

GRADING GUIDELINES:

Select Tight Knot (STK)

This grade defines the highest quality 'knotty' material. Knots and natural markings characterize the visual aesthetic of this grade evoking a rustic appeal. Knots are sound and tight. This grade allows for star checked and/or slightly chipped knots as well as spiked knots of limited length.

Clear Vertical Grain (CVG)

This grade defines premium quality 'clear' material. A consistent, straight grain pattern running generally parallel to the length of the board characterizes this grade. A highly stable grade, CVG material typically has minimal character markings providing a relatively uniform appearance. Caveats specific to this grade include light torn or raised grain, very light skips on edges and backs of boards, light warp and an occasional small knot.

The material has a distinctive reddish-brown color with subtle tonal variations.

INSTALLATION GUIDE:

- Rear ventilation and weather acclimatization are vital to minimize swelling and shrinking
- EXTERIOR: Contact reSAWN for Install Instructions
- INTERIOR: Visit resawntimberco.com A+D Support Page to download Interior Charred Installation Guidelines

PACKAGING AND FREIGHT:

All shipments are carefully packaged on 12'-16'+ long pallets (not boxed or bundled)

FINISH SPECS:

Interior

Finished on Face Only

Finished on Face Only, Sealed on Back & 2 Long Edges (Note: JENNINGS 2.0 ONLY)

Exterior

Finished on Face Only, Sealed on Back & 2 Long Edges

SUSTAINABLE ATTRIBUTES:

POSSIBLE LEED CREDITS: MR 5 - Regional Materials (based on project location)

PHYSICAL PROPERTIES OF WESTERN RED CEDAR:

SPECIFIC GRAVITY: 0.33

TANGENTIAL SHRINKAGE*: 5.0

RADIAL SHRINKAGE*: 2.4


* From green to oven dry, expressed as a percentage of green dimension.

* Physical properties based on information in USDA Wood Handbook - Wood as an Engineered Material - 2021


WESTERN RED CEDAR - DIMENSIONS & MILLING - STK and CVG:

- +/- 3/4" thick X +/- 5" wide X 6'-16' random lengths - Tongue & Groove
- +/- 3/4" thick X +/- 5-1/2" wide X 6'-16' random lengths - S4S
- Tongue & Groove with Reveal is custom order - please contact us for additional details
- Custom width, lengths, and millings available.
- NOTE: Drawings are not to scale

TONGUE & GROOVE

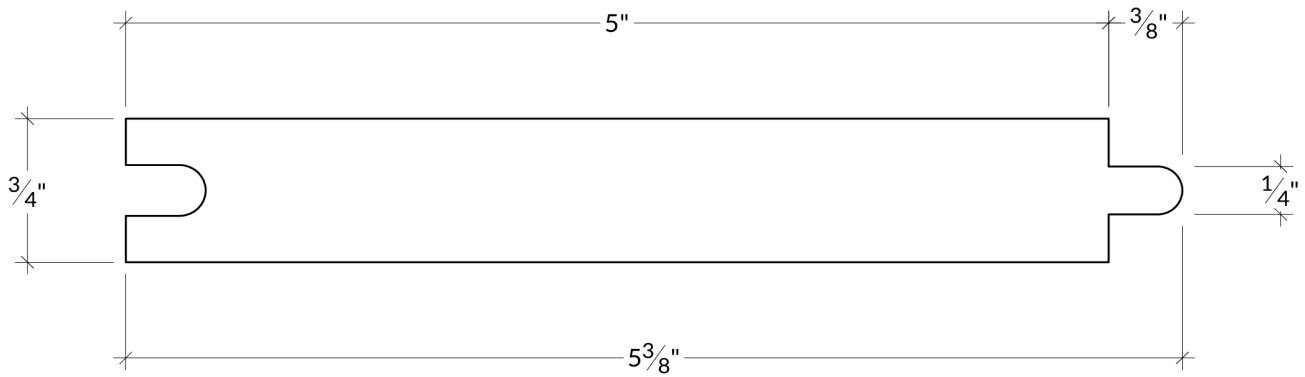


S4S

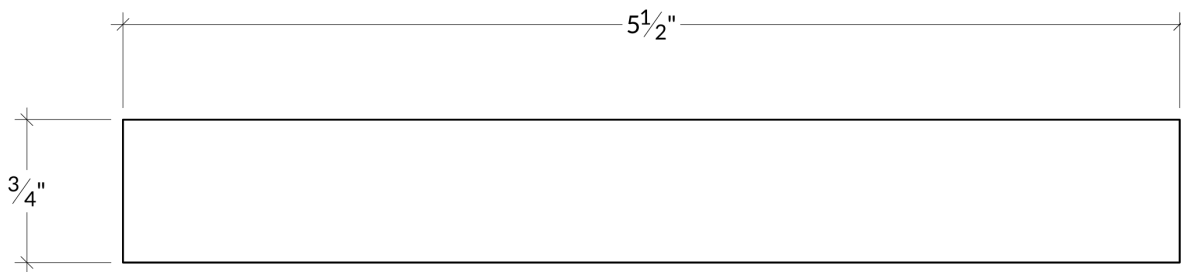


WESTERN RED CEDAR - DIMENSIONS & MILLING - STK:

- +/- 3/4" thick X +/- 6-3/4" wide X 6'-16' random lengths - Tongue & Groove
- +/- 3/4" thick X +/- 7-1/8" wide X 6'-16' random lengths - S4S
- Tongue & Groove with Reveal is custom order - please contact us for additional details
- Custom width, lengths, and millings available.
- NOTE: Drawings are not to scale

TONGUE & GROOVE

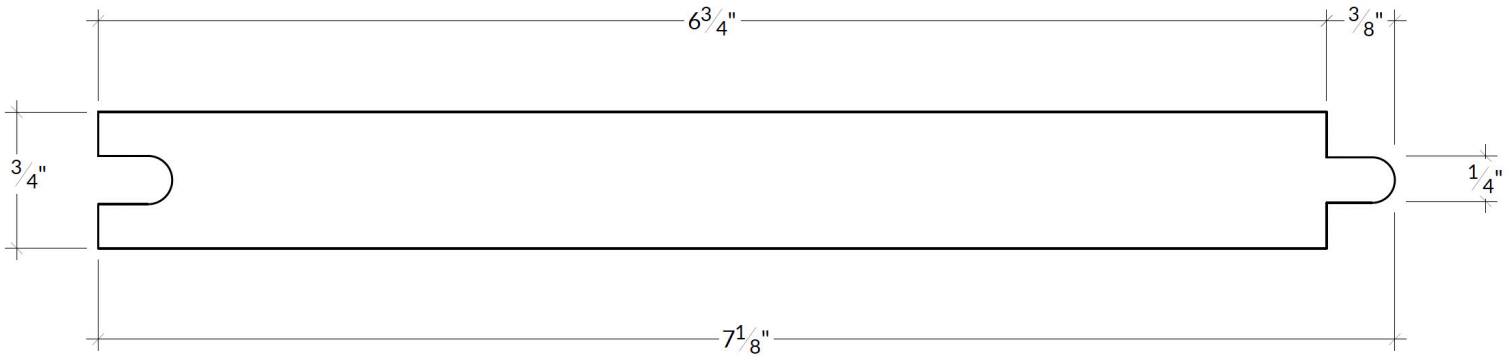

S4S

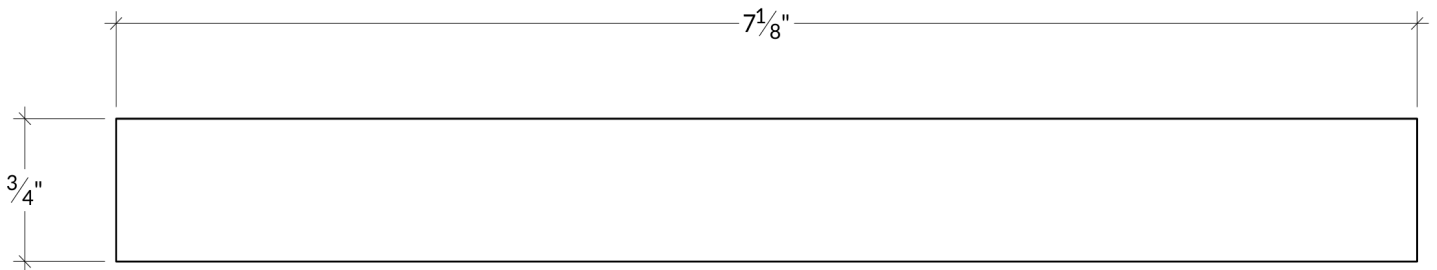

ALASKAN YELLOW CEDAR



WILLIWAW
ALASKAN YELLOW CEDAR - CVG



MATANUSKA
ALASKAN YELLOW CEDAR - CVG



TAKU
ALASKAN YELLOW CEDAR - STK



WASHOE
ALASKAN YELLOW CEDAR - STK



BROOKINGS
ALASKAN YELLOW CEDAR - STK



HAIDA
ALASKAN YELLOW CEDAR - STK



TOFINO
ALASKAN YELLOW CEDAR - STK



CARMANAH
ALASKAN YELLOW CEDAR - STK



YAKUTAT
ALASKAN YELLOW CEDAR - STK
(WEATHERED 6 MONTHS)

SPECIFICATIONS:

SPECIES:	Alaskan Yellow Cedar
APPLICATIONS:	Exterior & Interior Cladding (YAKUTAT is Exterior Only)
GRADES:	Select Tight Knot and Clear Vertical Grain
Janka Hardness (ASTM D 1037):	580 *
Flame Spread Class Rating (ASTM E84):	Class II (B) **
Smoke Developed Index (ASTM E84):	115 **

NOTE: SOME ARE AVAILABLE AS FIRE TREATED TO CLASS A FOR INTERIOR APPLICATIONS.

*Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN products.

**Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2024. Testing is on unfinished, solid wood. reSAWN's products are not tested but are expected to be close to actual measurements for comparable wood species – some products can be treated to Fire Treated to Class A for Interior Applications - please call to inquire.

Photo Disclaimer: Product photos are meant to be a general guide to product appearance only. Due to our handcrafted process and wood being a product of nature, the color, grain pattern, character and profile will vary between individual boards on a project and will never be an exact match.

GRADING GUIDELINES:

Select Tight Knot (STK)

This grade defines the highest quality 'knotty' material. Knots and natural markings characterize the visual aesthetic of this grade evoking a rustic appeal. Knots are sound and tight. This grade allows for star checked and/or slightly chipped knots as well as spiked knots of limited length.

Clear Vertical Grain (CVG)

This grade defines premium quality 'clear' material. A consistent, straight grain pattern running generally parallel to the length of the board characterizes this grade. A highly stable grade, CVG material typically has minimal character markings providing a relatively uniform appearance. Caveats specific to this grade include light torn or raised grain, very light skips on edges and backs of boards, light warp and an occasional small knot.

The material has a buttery golden-yellow color that can vary from pale to deep amber with occasional tonal streaks.

INSTALLATION GUIDE:

- Rear ventilation and weather acclimatization are vital to minimize swelling and shrinking
- EXTERIOR: Contact reSAWN for Install Instructions
- INTERIOR: Visit resawntimberco.com A+D Support Page to download Interior Wall Cladding Install Guidelines

PACKAGING AND FREIGHT:

All shipments are carefully packaged on 12'-16'+ long pallets (not boxed or bundled)

FINISH SPECS:

Interior

Finished on Face Only

Finished on Face Only, Sealed on Back & 2 Long Edges (Note: CARMANAH ONLY)

Exterior

Finished on Face Only, Sealed on Back & 2 Long Edges

POSSIBLE LEED CREDITS (V4.1)

Materials & Resources, Sourcing of Raw Materials (FSC®-Certified)

PHYSICAL PROPERTIES OF ALASKAN YELLOW CEDAR:

SPECIFIC GRAVITY:	0.46
TANGENTIAL SHRINKAGE*:	6.0
RADIAL SHRINKAGE*:	2.8


* From green to oven dry, expressed as a percentage of green dimension.

*Physical properties based on information in USDA Wood Handbook - Wood as an Engineered Material - 2021

ALASKAN YELLOW CEDAR - DIMENSIONS & MILLING:

- 3/4" thick X 5-1/8" wide X 6'-16' random lengths - Tongue & Groove
- 3/4" thick X 5-1/2" wide X 6'-16' random lengths - S4S
- Tongue & Groove with Reveal is custom order - please contact us for additional details
- Custom width, lengths, and millings available
- Bandsawn Face products are limited to T&G Profile
- NOTE: Drawings are not to scale

TONGUE & GROOVE

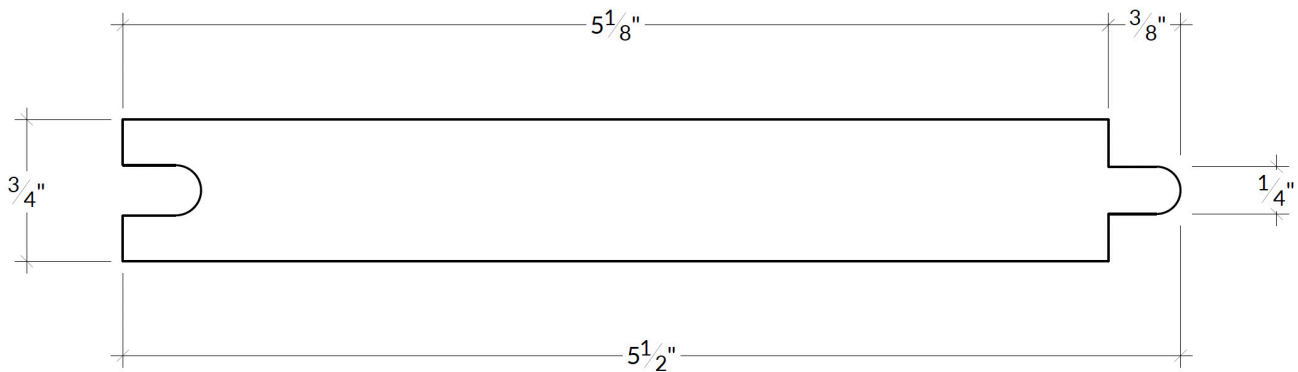

S4S

